

Models of Complex Networks

Complex Networks, SFI Summer School, June, 2010

Prof. Peter Dodds

Department of Mathematics & Statistics
Center for Complex Systems
Vermont Advanced Computing Center
University of Vermont



Licensed under the *Creative Commons Attribution-NonCommercial-ShareAlike 3.0 License*.

Models of
Complex Networks

Modeling Complex
Networks

Random networks
Basics
Configuration model

Scale-free
networks
History
BA model
Redner & Krapivsky's
model
Robustness

Small-world
networks
References

Frame 1/73



Outline

Modeling Complex Networks

Random networks

Basics
Configuration model

Scale-free networks

History
BA model
Redner & Krapivsky's model
Robustness

Small-world networks

References

Models of
Complex Networks

Modeling Complex
Networks

Random networks
Basics
Configuration model

Scale-free
networks
History
BA model
Redner & Krapivsky's
model
Robustness

Small-world
networks
References

Frame 2/73



Models

Some important models:

1. Generalized random networks
2. Scale-free networks (田)
3. Small-world networks (田)
4. Statistical generative models (p^*)
5. Generalized affiliation networks

Models of
Complex Networks

Modeling Complex
Networks

Random networks
Basics
Configuration model

Scale-free
networks
History
BA model
Redner & Krapivsky's
model
Robustness

Small-world
networks
References

Frame 3/73



Models

1. Generalized random networks:

- ▶ Arbitrary degree distribution P_k .
- ▶ Wire nodes together randomly.
- ▶ Create ensemble to test deviations from randomness.
- ▶ Interesting, applicable, rich mathematically.
- ▶ Much fun to be had with these guys...

Models of
Complex Networks

Modeling Complex
Networks

Random networks
Basics
Configuration model

Scale-free
networks
History
BA model
Redner & Krapivsky's
model
Robustness


Small-world
networks
References

Frame 4/73



Models

2. 'Scale-free networks':



$\gamma = 2.5$
 $\langle k \rangle = 1.8$
 $N = 150$

- ▶ Due to Barabasi and Albert [2]
- ▶ Generative model
- ▶ Preferential attachment model with growth
- ▶ $P[\text{attachment to node } i] \propto k_i^\alpha$.
- ▶ Produces $P_k \sim k^{-\gamma}$ when $\alpha = 1$.
- ▶ Trickiness: other models generate skewed degree distributions...

Models of Complex Networks

Modeling Complex Networks

- Random networks
 - Basics
 - Configuration model
- Scale-free networks
 - History
 - BA model
 - Redner & Krapivsky's model
 - Robustness
- Small-world networks
- References

Frame 5/73

Models

3. Small-world networks


- ▶ Due to Watts and Strogatz [18]

Two scales:

- ▶ **local regularity** (high clustering—an individual's friends know each other)
- ▶ **global randomness** (shortcuts).

Strong effects:

- ▶ Shortcuts make world 'small'
- ▶ Shortcuts allow disease to jump
- ▶ Facilitates synchronization [7]



Models of Complex Networks

Modeling Complex Networks

- Random networks
 - Basics
 - Configuration model
- Scale-free networks
 - History
 - BA model
 - Redner & Krapivsky's model
 - Robustness
- Small-world networks
- References

Frame 6/73

Models

4. Generative statistical models

- ▶ Idea is to realize networks based on certain tendencies:
 - ▶ Clustering (triadic closure)..
 - ▶ Types of nodes that like each other..
 - ▶ Anything really...
- ▶ Use statistical methods to estimate 'best' values of parameters.
- ▶ **Drawback:** parameters are not real, measurable quantities.
- ▶ Non-mechanistic and blackboxish.
- ▶ c.f., temperature in statistical mechanics.

Models of Complex Networks


Modeling Complex Networks

- Random networks
 - Basics
 - Configuration model
- Scale-free networks
 - History
 - BA model
 - Redner & Krapivsky's model
 - Robustness
- Small-world networks
- References

Frame 7/73

Models

5. Generalized affiliation networks

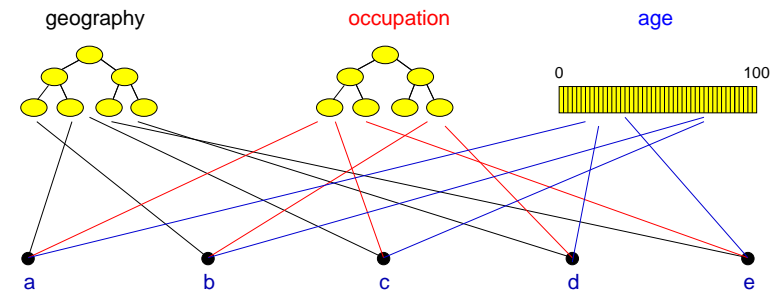

- ▶ Blau & Schwartz [3], Simmel [15], Breiger [4], Watts et al. [17]

Models of Complex Networks

Modeling Complex Networks

- Random networks
 - Basics
 - Configuration model
- Scale-free networks
 - History
 - BA model
 - Redner & Krapivsky's model
 - Robustness
- Small-world networks
- References

Frame 8/73

Pure, abstract random networks:

- ▶ Consider set of all networks with N labelled nodes and m edges.
- ▶ Horribly, there are $\binom{N}{2}$ of them.
- ▶ Standard random network = randomly chosen network from this set.
- ▶ To be clear: each network is **equally** probable.
- ▶ Known as Erdős-Rényi random networks
- ▶ Key structural feature of random networks is that they locally look like **branching networks**
- ▶ (No small cycles and zero clustering).

Models of Complex Networks

Modeling Complex Networks

Random networks
Basics
Configuration model


Scale-free networks
History
BA model
Redner & Krapivsky's model
Robustness

Small-world networks

References

Frame 10/73

Random networks: examples for $N=500$

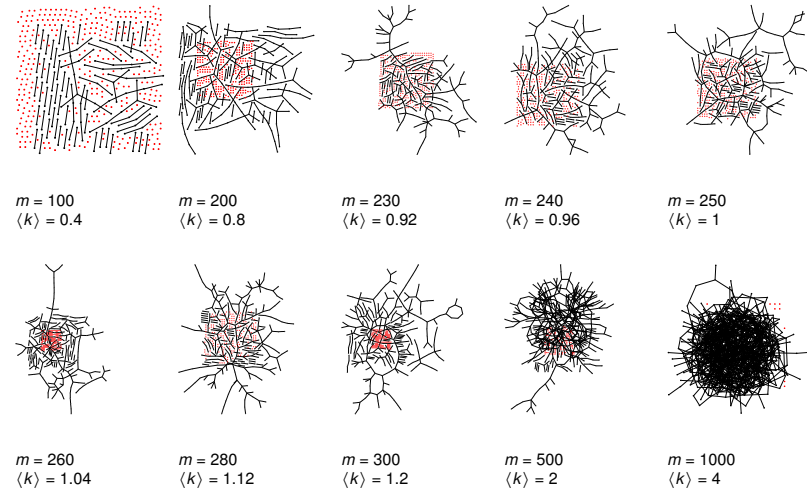

Models of Complex Networks

Modeling Complex Networks

Random networks
Basics
Configuration model


Scale-free networks
History
BA model
Redner & Krapivsky's model
Robustness

Small-world networks

References

Frame 12/73

Random networks: largest components

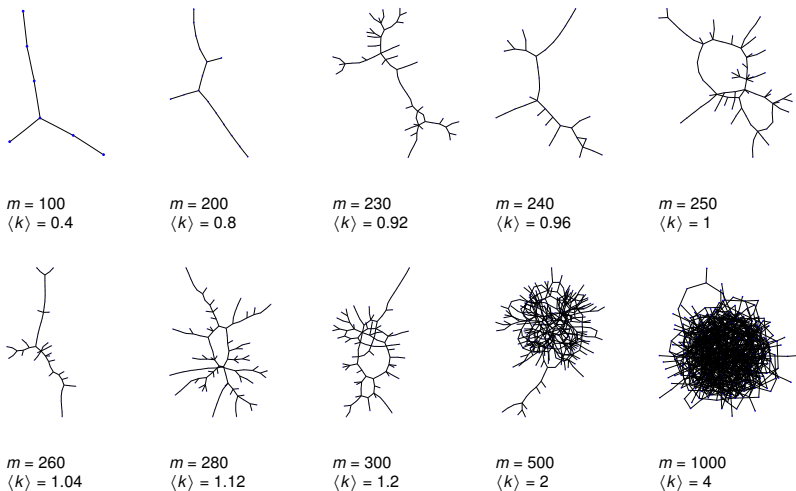

Models of Complex Networks

Modeling Complex Networks

Random networks
Basics
Configuration model


Scale-free networks
History
BA model
Redner & Krapivsky's model
Robustness

Small-world networks

References

Frame 13/73

Giant component:

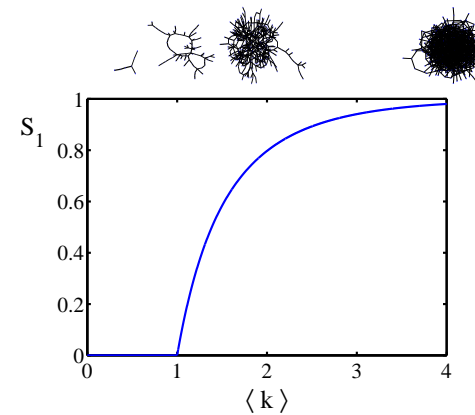

- ▶ S_1 = fraction of nodes in largest component.
- ▶ Old school phase transition.
- ▶ Key idea in modeling contagion.

Models of Complex Networks

Modeling Complex Networks

Random networks
Basics
Configuration model

Scale-free networks
History
BA model
Redner & Krapivsky's model
Robustness

Small-world networks

References

Frame 14/73

Properties

But:

- ▶ Erdős-Rényi random networks are a *mathematical construct*.
- ▶ Real networks are a microscopic subset of all networks...
- ▶ ex: 'Scale-free' networks are **growing networks** that form according to a **plausible mechanism**.

But but:

- ▶ Randomness is out there, just not to the degree of a completely random network.

Models of Complex Networks

- Modeling Complex Networks
- Random networks
 - Basics
 - Configuration model
- Scale-free networks
 - History
 - BA model
 - Redner & Krapivsky's model
 - Robustness
- Small-world networks
- References

Frame 15/73

General random networks

- ▶ So... standard random networks have a Poisson degree distribution
- ▶ Can happily generalize to arbitrary degree distribution P_k .
- ▶ Also known as the **configuration model**.^[11]
- ▶ Can generalize construction method from ER random networks.
- ▶ Assign each node a **weight w** from some distribution and form links with probability

$$P(\text{link between } i \text{ and } j) \propto w_i w_j.$$


- ▶ A more useful way:
 1. **Randomly wire up** (and rewire) already existing nodes with fixed degrees.
 2. Examine **mechanisms** that lead to networks with certain degree distributions.

Models of Complex Networks

- Modeling Complex Networks
- Random networks
 - Basics
 - Configuration model
- Scale-free networks
 - History
 - BA model
 - Redner & Krapivsky's model
 - Robustness
- Small-world networks
- References

Frame 17/73

General random rewiring algorithm

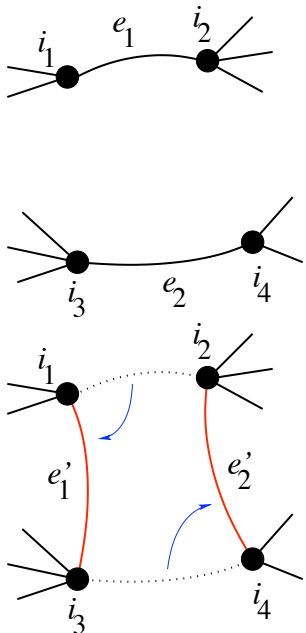


- ▶ Randomly choose **two edges**. (Or choose problem edge and a random edge)
- ▶ Check to make sure edges are **disjoint**.
- ▶ Rewire one end of each edge.
- ▶ Node degrees **do not change**.
- ▶ Works if e_1 is a self-loop or repeated edge.
- ▶ Same as finding on/off/on/off 4-cycles. and rotating them.

Models of Complex Networks

- Modeling Complex Networks
- Random networks
 - Basics
 - Configuration model
- Scale-free networks
 - History
 - BA model
 - Redner & Krapivsky's model
 - Robustness
- Small-world networks
- References

Frame 18/73

Random networks: largest components

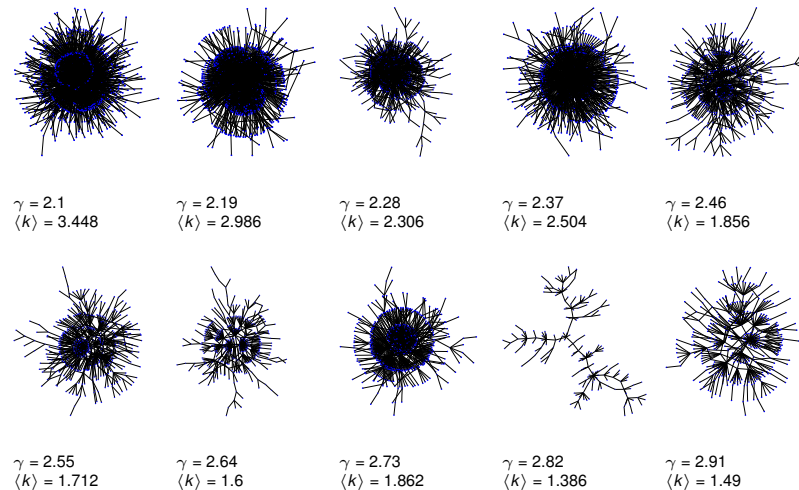

Models of Complex Networks

- Modeling Complex Networks
- Random networks
 - Basics
 - Configuration model
- Scale-free networks
 - History
 - BA model
 - Redner & Krapivsky's model
 - Robustness
- Small-world networks
- References

Frame 20/73

The edge-degree distribution:

- ▶ The degree distribution P_k is fundamental for our description of many complex networks
- ▶ A related key distribution:
 R_k = probability that a friend of a random node has k other friends.

$$R_k = \frac{(k+1)P_{k+1}}{\sum_{k'=0}^{\infty} (k'+1)P_{k'+1}} = \frac{(k+1)P_{k+1}}{\langle k \rangle}$$

- ▶ **Natural question:** what's the expected number of other friends that one friend has?

- ▶ Find

$$\langle k \rangle_R = \frac{1}{\langle k \rangle} (\langle k^2 \rangle - \langle k \rangle)$$

- ▶ True for **all** random networks, **independent of degree distribution.**

Giant component condition

- ▶ If:

$$\langle k \rangle_R = \frac{1}{\langle k \rangle} (\langle k^2 \rangle - \langle k \rangle) > 1$$

then our random network has a giant component.

- ▶ **Exponential explosion** in number of nodes as we move out from a random node.

- ▶ Number of nodes expected at n steps:

$$\langle k \rangle \cdot \langle k \rangle_R^{n-1} = \frac{1}{\langle k \rangle^{n-2}} (\langle k^2 \rangle - \langle k \rangle)^{n-1}$$

- ▶ We'll see this again for contagion models...

Mild weirdness...

- ▶ Average # friends of friends per node is

$$\langle k_2 \rangle = \langle k^2 \rangle - \langle k \rangle.$$

- ▶ Average depends on the **1st and 2nd moments** of P_k and **not just the 1st moment.**

- ▶ Three peculiarities:

1. We might guess $\langle k_2 \rangle = \langle k \rangle (\langle k \rangle - 1)$ but it's actually $\langle k(k-1) \rangle$.
2. If P_k has a **large second moment**, then $\langle k_2 \rangle$ will be big.
3. Your friends have **more friends** than you...

Size distributions

The sizes of many systems' elements appear to obey an **inverse power-law size distribution**:


$$P(\text{size} = x) \sim c x^{-\gamma}$$

where $x_{\min} < x < x_{\max}$ and $\gamma > 1$.

- ▶ x can be continuous or discrete.
- ▶ Typically, $2 < \gamma < 3$.
- ▶ **No dominant internal scale** between x_{\min} and x_{\max} .
- ▶ If $\gamma < 3$, variance and higher moments are **'infinite'**
- ▶ If $\gamma < 2$, mean and higher moments are **'infinite'**
- ▶ Negative linear relationship in log-log space:

$$\log P(x) = \log c - \gamma \log x$$

A beautiful, heart-warming example:

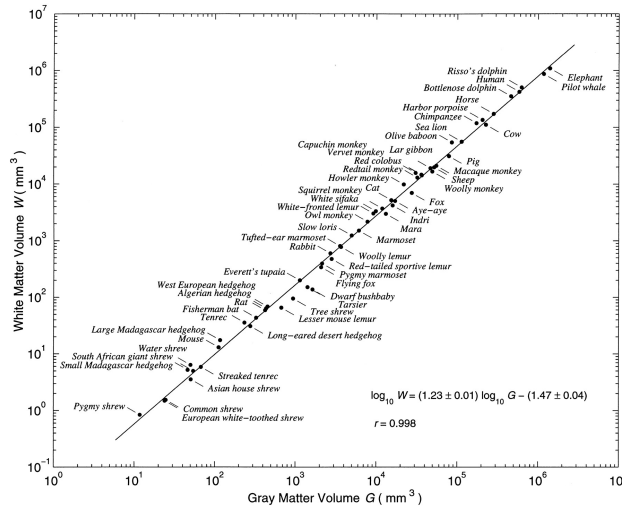

$$\alpha \approx 1.23$$

gray matter:
'computing elements'

white matter:
'wiring'

from Zhang & Sejnowski, PNAS (2000) [20]

Size distributions

Power law size distributions are sometimes called Pareto distributions (田) after Italian scholar Vilfredo Pareto.

- ▶ Pareto noted wealth in Italy was distributed unevenly (80–20 rule).
- ▶ Term used especially by economists

Size distributions

Examples:

- ▶ Earthquake magnitude (Gutenberg Richter law): $P(M) \propto M^{-3}$
- ▶ Number of war deaths: $P(d) \propto d^{-1.8}$ [14]
- ▶ Sizes of forest fires
- ▶ Sizes of cities: $P(n) \propto n^{-2.1}$
- ▶ Number of links to and from websites

Size distributions

Examples:

- ▶ Number of citations to papers: $P(k) \propto k^{-3}$.
- ▶ Individual wealth (maybe): $P(W) \propto W^{-2}$.
- ▶ Distributions of tree trunk diameters: $P(d) \propto d^{-2}$.
- ▶ The gravitational force at a random point in the universe: $P(F) \propto F^{-5/2}$.
- ▶ Diameter of moon craters: $P(d) \propto d^{-3}$.
- ▶ Word frequency: e.g., $P(k) \propto k^{-2.2}$ (variable)

Note: Exponents range in error;
see M.E.J. Newman arxiv.org/cond-mat/0412004v3 (田)

History

- ▶ **Random Additive/Copying Processes** involving Competition.
- ▶ **Widespread:** Words, Cities, the Web, Wealth, Productivity (Lotka), Popularity (Books, People, ...)
- ▶ Competing mechanisms (more trickiness)

Models of Complex Networks

- Modeling Complex Networks
- Random networks
 - Basics
 - Configuration model
- Scale-free networks
 - History
 - BA model
 - Redner & Krapivsky's model
 - Robustness
- Small-world networks
- References

Frame 30/73

Work of Yore

- ▶ 1924: **G. Udry Yule**^[19]:
Species per Genus
- ▶ 1926: **Lotka**^[9]:
Scientific papers per author (Lotka's law)
- ▶ 1953: **Mandelbrot**^[10]:
Optimality argument for Zipf's law; focus on language.
- ▶ 1955: **Herbert Simon**^[16, 21]:
Zipf's law for word frequency, city size, income, publications, and species per genus.
- ▶ 1965/1976: **Derek de Solla Price**^[12, 13]:
Network of Scientific Citations.
- ▶ 1999: **Barabasi and Albert**^[2]:
The World Wide Web, networks-at-large.

Models of Complex Networks

- Modeling Complex Networks
- Random networks
 - Basics
 - Configuration model
- Scale-free networks
 - History
 - BA model
 - Redner & Krapivsky's model
 - Robustness
- Small-world networks
- References

Frame 31/73

Not everyone is happy...



Mandelbrot vs. Simon:

- ▶ Mandelbrot (1953): "An Informational Theory of the Statistical Structure of Languages"^[10]
- ▶ Simon (1955): "On a class of skew distribution functions"^[16]
- ▶ Mandelbrot (1959): "A note on a class of skew distribution function: analysis and critique of a paper by H.A. Simon"
- ▶ Simon (1960): "Some further notes on a class of skew distribution functions"

Models of Complex Networks

- Modeling Complex Networks
- Random networks
 - Basics
 - Configuration model
- Scale-free networks
 - History
 - BA model
 - Redner & Krapivsky's model
 - Robustness
- Small-world networks
- References

Frame 32/73

Not everyone is happy... (cont.)

Mandelbrot vs. Simon:

- ▶ Mandelbrot (1961): "Final note on a class of skew distribution functions: analysis and critique of a model due to H.A. Simon"
- ▶ Simon (1961): "Reply to 'final note' by Benoit Mandelbrot"
- ▶ Mandelbrot (1961): "Post scriptum to 'final note'"
- ▶ Simon (1961): "Reply to Dr. Mandelbrot's post scriptum"

Models of Complex Networks

- Modeling Complex Networks
- Random networks
 - Basics
 - Configuration model
- Scale-free networks
 - History
 - BA model
 - Redner & Krapivsky's model
 - Robustness
- Small-world networks
- References

Frame 33/73

Not everyone is happy... (cont.)

Mandelbrot:

“We shall restate in detail our 1959 objections to Simon’s 1955 model for the Pareto-Yule-Zipf distribution. **Our objections are valid** quite irrespectively of the sign of $p-1$, so that **most of Simon’s (1960) reply was irrelevant.**”

Simon:

“Dr. Mandelbrot has proposed a new set of objections to my 1955 models of the Yule distribution. **Like his earlier objections, these are invalid.**”

Essential Extract of a Growth Model

Random Competitive Replication (RCR):

1. Start with 1 element of a particular flavor at $t = 1$
2. At time $t = 2, 3, 4, \dots$, add a new element in one of two ways:
 - ▶ With probability ρ , create a new element with a new flavor
▶ **Mutation/Innovation**
 - ▶ With probability $1 - \rho$, randomly choose from all existing elements, and make a copy.
▶ **Replication/Imitation**
 - ▶ Elements of the same flavor form a group

Random Competitive Replication

Example: Words in a text

- ▶ Consider words as they appear sequentially.
- ▶ With probability ρ , the next word has not previously appeared
▶ **Mutation/Innovation**
- ▶ With probability $1 - \rho$, randomly choose one word from all words that have come before, and reuse this word
▶ **Replication/Imitation**
- ▶ Please note: authors do not do this...

Random Competitive Replication

- ▶ Competition for replication **between elements is random**
- ▶ Competition for growth **between groups is not random**
- ▶ Selection on groups is **biased by size**
- ▶ **Rich-gets-richer** story
- ▶ Random selection is **easy**
- ▶ No great knowledge of system needed

Random Competitive Replication

- ▶ After some thrashing around, one finds:

$$P_k \propto k^{-\frac{(2-\rho)}{(1-\rho)}} = k^{-\gamma}$$

$$\gamma = 1 + \frac{1}{(1-\rho)}$$

- ▶ See γ is governed by rate of new flavor creation, ρ .

Models of Complex Networks

Modeling Complex Networks

Random networks

Basics

Configuration model

Scale-free networks

History

BA model

Redner & Krapivsky's model

Robustness

Small-world networks

References

Frame 38/73

Evolution of catch phrases

- ▶ Yule's paper (1924) [19]:
"A mathematical theory of evolution, based on the conclusions of Dr J. C. Willis, F.R.S."
- ▶ Simon's paper (1955) [16]:
"On a class of skew distribution functions" (snore)
- ▶ Price's term: **Cumulative Advantage**

Models of Complex Networks

Modeling Complex Networks

Random networks

Basics

Configuration model

Scale-free networks

History

BA model

Redner & Krapivsky's model

Robustness

Small-world networks

References

Frame 39/73

Evolution of catch phrases

- ▶ Robert K. Merton: **the Matthew Effect**
- ▶ Studied careers of scientists and found credit flowed disproportionately to the already famous

From the Gospel of Matthew:

"For to every one that hath shall be given...

(Wait! There's more....)

but from him that hath not, that also which he seemeth to have shall be taken away.

And cast the worthless servant into the outer darkness; there men will weep and gnash their teeth."

Models of Complex Networks

Modeling Complex Networks

Random networks

Basics

Configuration model

Scale-free networks

History

BA model

Redner & Krapivsky's model

Robustness

Small-world networks

References

Frame 40/73

Evolution of catch phrases

Merton was a catchphrase machine:

1. self-fulfilling prophecy
2. role model
3. unintended (or unanticipated) consequences
4. focused interview → focus group

And just to rub it in...

Merton's son, Robert C. Merton, won the Nobel Prize for Economics in 1997.

Models of Complex Networks

Modeling Complex Networks

Random networks

Basics

Configuration model

Scale-free networks

History

BA model

Redner & Krapivsky's model

Robustness

Small-world networks

References

Frame 41/73

Evolution of catch phrases

- ▶ Barabási and Albert^[2]—thinking about the Web
- ▶ Independent reinvention of a version of Simon and Price's theory for networks
- ▶ Another term: “**Preferential Attachment**”
- ▶ Basic idea: a new node arrives every discrete time step and connects to an existing node i with probability $\propto k_i$.
- ▶ **Connection:**
Groups of a single flavor \sim edges of a node
- ▶ **Small hitch:** selection mechanism is now non-random
- ▶ **Solution:** Connect to a random node (**easy**)
- ▶ + Randomly connect to the node's friends (**also easy**)
- ▶ Scale-free networks = food on the table for physicists



Models of Complex Networks

Modeling Complex Networks

Random networks
Basics
Configuration model

Scale-free networks
History
BA model
Redner & Krapivsky's model
Robustness

Small-world networks

References

Frame 42/73

Scale-free networks

- ▶ Networks with power-law degree distributions have become known as **scale-free** networks.
- ▶ Scale-free refers specifically to the **degree distribution** having a **power-law decay** in its tail:

$$P_k \sim k^{-\gamma} \text{ for 'large' } k$$

- ▶ Please note: not every network is a scale-free network...

Models of Complex Networks

Modeling Complex Networks

Random networks
Basics
Configuration model

Scale-free networks
History
BA model
Redner & Krapivsky's model
Robustness

Small-world networks

References

Frame 44/73

Scale-free networks

- ▶ Term 'scale-free' is somewhat confusing...
- ▶ Scale-free networks are **not fractal** in any sense.
- ▶ Usually talking about networks whose links are **abstract, relational, informational, ...** (non-physical)
- ▶ Main reason is **link cost**.
- ▶ Primary example: hyperlink network of the Web
- ▶ Much arguing about whether or networks are 'scale-free' or not...

Models of Complex Networks

Modeling Complex Networks

Random networks
Basics
Configuration model

Scale-free networks
History
BA model
Redner & Krapivsky's model
Robustness

Small-world networks

References

Frame 45/73

Scale-free networks

The big deal:

- ▶ We move beyond describing networks to finding **mechanisms** for why certain networks arise.

A big deal for scale-free networks:

- ▶ How does the exponent γ depend on the mechanism?
- ▶ Do the mechanism's details matter?
- ▶ We know they do for Simon's model...

Models of Complex Networks

Modeling Complex Networks

Random networks
Basics
Configuration model

Scale-free networks
History
BA model
Redner & Krapivsky's model
Robustness

Small-world networks

References

Frame 46/73

Real data (eek!)

From Barabási and Albert's original paper [2]:

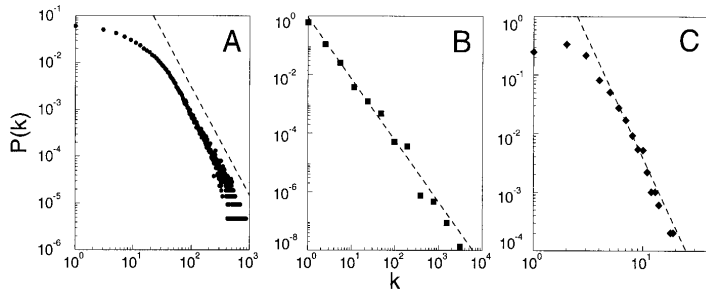


Fig. 1. The distribution function of connectivities for various large networks. (A) Actor collaboration graph with $N = 212,250$ vertices and average connectivity $\langle k \rangle = 28.78$. (B) WWW, $N = 325,729$, $\langle k \rangle = 5.46$ (6). (C) Power grid data, $N = 4941$, $\langle k \rangle = 2.67$. The dashed lines have slopes (A) $\gamma_{actor} = 2.3$, (B) $\gamma_{www} = 2.1$ and (C) $\gamma_{power} = 4$.

- ▶ But typically for real networks: $2 < \gamma < 3$.
- ▶ (Plot C is on the bogus side of things...)

Generalized model

Fooling with the mechanism:

- ▶ 2001: Redner & Krapivsky (RK) [8] explored the **general attachment kernel**:

$$\Pr(\text{attach to node } i) \propto A_k = k_i^\nu$$

where A_k is the attachment kernel and $\nu > 0$.

- ▶ RK also looked at changing very subtle details of the attachment kernel.
- ▶ e.g., keep $A_k \sim k$ for large k but tweak A_k for low k .
- ▶ RK's approach is to use rate equations (田).

Universality?

- ▶ Consider $A_1 = \alpha$ and $A_k = k$ for $k \geq 2$.
- ▶ Some unsettling calculations leads to $P_k \sim k^{-\gamma}$ where

$$\gamma = 1 + \frac{1 + \sqrt{1 + 8\alpha}}{2}.$$

- ▶ We then have

$$0 \leq \alpha < \infty \Rightarrow 2 \leq \gamma < \infty$$

- ▶ Crazyiness...

Sublinear attachment kernels

- ▶ Rich-get-somewhat-richer:

$$A_k \sim k^\nu \text{ with } 0 < \nu < 1.$$

- ▶ General finding by Krapivsky and Redner: [8]

$$P_k \sim k^{-\nu} e^{-c_1 k^{1-\nu} + \text{correction terms}}.$$

- ▶ Weibull distributionish (truncated power laws).
- ▶ **Universality**: now details of kernel **do not** matter.

Superlinear attachment kernels

- ▶ Rich-get-much-richer:

$$A_k \sim k^\nu \text{ with } \nu > 1.$$

- ▶ Now a **winner-take-all** mechanism.
- ▶ One single node ends up being connected to almost all other nodes.
- ▶ For $\nu > 2$, all but a finite # of nodes connect to one node.


Models of Complex Networks

- Modeling Complex Networks
- Random networks
 - Basics
 - Configuration model
- Scale-free networks
 - History
 - BA model
 - Redner & Krapivsky's model
 - Robustness
- Small-world networks
- References

Frame 52/73

Robustness

- ▶ Standard random networks (Erdős-Rényi) versus **Scale-free networks**

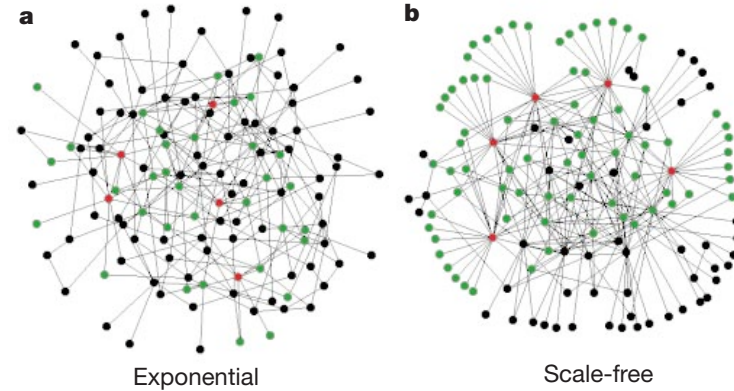


from Albert et al., 2000 "Error and attack tolerance of complex networks" [1]

Models of Complex Networks

- Modeling Complex Networks
- Random networks
 - Basics
 - Configuration model
- Scale-free networks
 - History
 - BA model
 - Redner & Krapivsky's model
 - Robustness
- Small-world networks
- References

Frame 54/73

Robustness

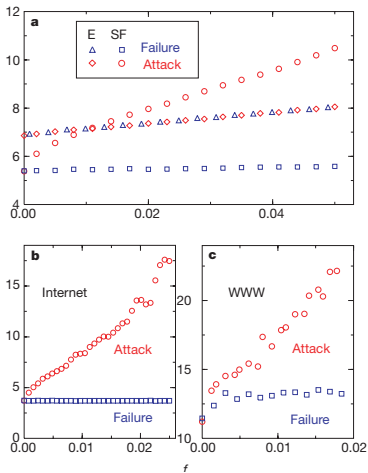

- ▶ Plots of network diameter as a function of fraction of nodes removed
- ▶ Erdős-Rényi versus scale-free networks
- ▶ **blue symbols** = random removal
- ▶ **red symbols** = targeted removal (most connected first)

from Albert et al., 2000

Models of Complex Networks

- Modeling Complex Networks
- Random networks
 - Basics
 - Configuration model
- Scale-free networks
 - History
 - BA model
 - Redner & Krapivsky's model
 - Robustness
- Small-world networks
- References

Frame 55/73

Robustness


- ▶ Scale-free networks are thus **robust to random failures** yet **fragile to targeted ones**.
- ▶ All very reasonable: **Hubs** are a big deal.
- ▶ **But:** next issue is whether hubs are vulnerable or not.
- ▶ Representing all webpages as the same size node is obviously a stretch (e.g., google vs. a random person's webpage)
- ▶ Most connected nodes are either:
 1. Physically larger nodes that may be harder to 'target'
 2. or subnetworks of smaller, normal-sized nodes.
- ▶ Need to explore cost of various targeting schemes.

Models of Complex Networks

- Modeling Complex Networks
- Random networks
 - Basics
 - Configuration model
- Scale-free networks
 - History
 - BA model
 - Redner & Krapivsky's model
 - Robustness
- Small-world networks
- References

Frame 56/73

Milgram's social search experiment (1960s)

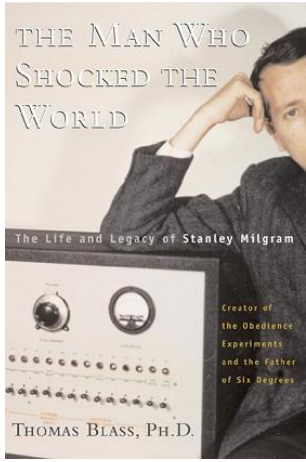

<http://www.stanleymilgram.com>

- ▶ Target person = Boston stockbroker.
- ▶ 296 senders from Boston and Omaha.
- ▶ 20% of senders reached target.
- ▶ chain length ≈ 6.5 .

Popular terms:

- ▶ The Small World Phenomenon;
- ▶ "Six Degrees of Separation."

Models of Complex Networks

- Modeling Complex Networks
- Random networks
 - Basics
 - Configuration model
- Scale-free networks
 - History
 - BA model
 - Redner & Krapivsky's model
 - Robustness
- Small-world networks
- References

Frame 57/73

Milgram's experiment with e-mail [5]



Participants:

- ▶ 60,000+ people in 166 countries
- ▶ 24,000+ chains
- ▶ Big media boost...

18 targets in 13 countries including

- ▶ a professor at an Ivy League university,
- ▶ a technology consultant in India,
- ▶ a policeman in Australia,
- ▶ a potter in New Zealand,
- ▶ a veterinarian in the Norwegian army.

Models of Complex Networks

- Modeling Complex Networks
- Random networks
 - Basics
 - Configuration model
- Scale-free networks
 - History
 - BA model
 - Redner & Krapivsky's model
 - Robustness
- Small-world networks
- References

Frame 58/73

Social search—the Columbia experiment

The world is smaller:


- ▶ $\langle L \rangle = 4.05$ for all completed chains
- ▶ L_* = Estimated 'true' median chain length (zero attrition)
 - ▶ Intra-country chains: $L_* = 5$
 - ▶ Inter-country chains: $L_* = 7$
 - ▶ All chains: $L_* = 7$
- ▶ c.f. Milgram (zero attrition): $L_* \approx 9$

Models of Complex Networks

- Modeling Complex Networks
- Random networks
 - Basics
 - Configuration model
- Scale-free networks
 - History
 - BA model
 - Redner & Krapivsky's model
 - Robustness
- Small-world networks
- References

Frame 59/73

Randomness + regularity

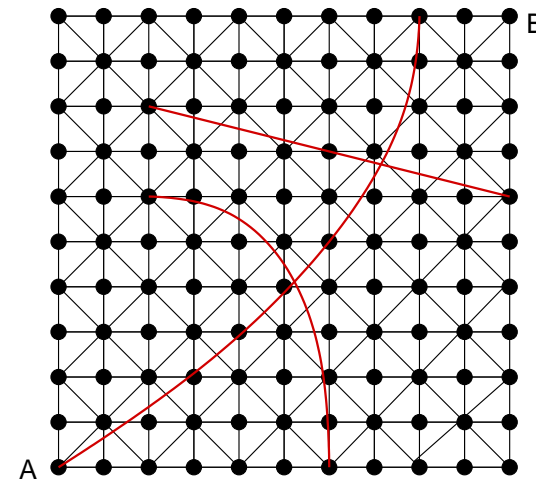

$d_{AB} = 10$ without random paths
 $d_{AB} = 3$ with random paths

$\langle d \rangle$ decreases overall

Models of Complex Networks

- Modeling Complex Networks
- Random networks
 - Basics
 - Configuration model
- Scale-free networks
 - History
 - BA model
 - Redner & Krapivsky's model
 - Robustness
- Small-world networks
- References

Frame 60/73

Theory of Small-World networks

Introduced by

Watts and Strogatz (Nature, 1998) ^[18]

“Collective dynamics of ‘small-world’ networks.”

Small-world networks are found everywhere:

- ▶ neural network of *C. elegans*,
- ▶ semantic networks of languages,
- ▶ actor collaboration graph,
- ▶ food webs,
- ▶ social networks of comic book characters,...

Very weak requirements:

- ▶ **local regularity** + random short cuts

Previous work—finding short paths

But are these short cuts findable?

No!

Nodes **cannot** find each other quickly with **any local search method**.

- ▶ Jon Kleinberg (Nature, 2000) ^[6] “Navigation in a small world.”
- ▶ Only certain networks are **navigable**
- ▶ So what’s special about social networks?

The model

One approach: incorporate **identity**.

(See “Identity and Search in Social Networks.” Science, 2002, Watts, Dodds, and Newman ^[17])


Identity is formed from attributes such as:

- ▶ Geographic location
- ▶ Type of employment
- ▶ Religious beliefs
- ▶ Recreational activities.

Groups are formed by people with at least one similar attribute.


Attributes ⇔ Contexts ⇔ Interactions ⇔ Networks.

Social distance—Bipartite affiliation networks

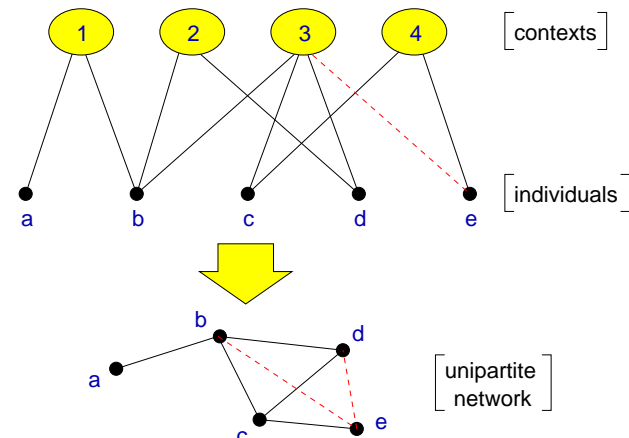


Bipartite affiliation networks: boards and directors, movies and actors.

Social distance as a function of identity

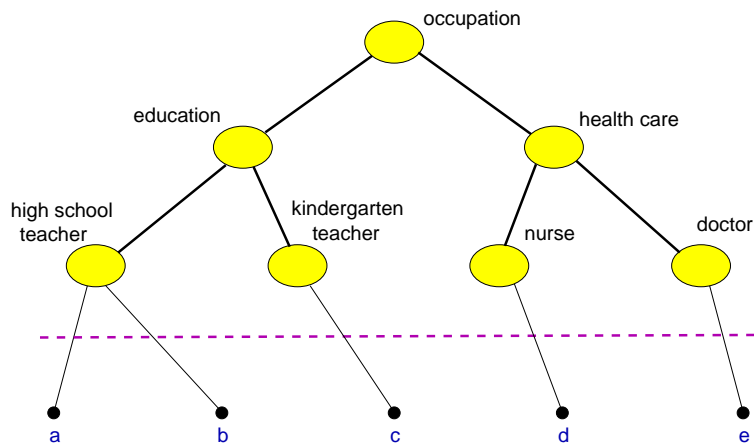

Homophily

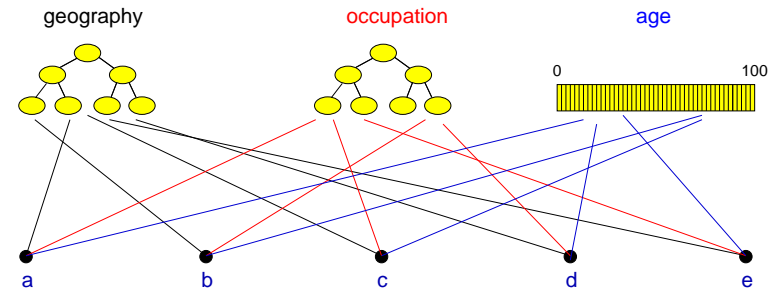

(Blau & Schwartz, Simmel, Breiger)

- ▶ Networks built with **'birds of a feather...'** are searchable.
- ▶ Attributes \Leftrightarrow Contexts \Leftrightarrow Interactions \Leftrightarrow Networks.

Social Search—Real world uses


- ▶ Tagging: e.g., Flickr induces a network between photos
- ▶ Search in organizations for solutions to problems
- ▶ Peer-to-peer networks
- ▶ Synchronization in networked systems
- ▶ Motivation for search matters...

References I

- [1] R. Albert, H. Jeong, and A.-L. Barabási. Error and attack tolerance of complex networks. *Nature*, 406:378–382, July 2000. [pdf](#) (田)
- [2] A.-L. Barabási and R. Albert. Emergence of scaling in random networks. *Science*, 286:509–511, 1999. [pdf](#) (田)
- [3] P. M. Blau and J. E. Schwartz. *Crosscutting Social Circles*. Academic Press, Orlando, FL, 1984.
- [4] R. L. Breiger. The duality of persons and groups. *Social Forces*, 53(2):181–190, 1974. [pdf](#) (田)


References II

- [5] P. S. Dodds, R. Muhamad, and D. J. Watts.
An experimental study of search in global social networks.
Science, 301:827–829, 2003. [pdf](#) (田)
- [6] J. Kleinberg.
Navigation in a small world.
Nature, 406:845, 2000. [pdf](#) (田)
- [7] G. Korniss, M. A. Novotny, H. Guclu, Z. Toroczkai, and P. A. Rikvold.
Suppressing roughness of virtual times in parallel discrete-event simulations.
Science, 299:677–679, 2003. [pdf](#) (田)
- [8] P. L. Krapivsky and S. Redner.
Organization of growing random networks.
Phys. Rev. E, 63:066123, 2001. [pdf](#) (田)




References III

- [9] A. J. Lotka.
The frequency distribution of scientific productivity.
Journal of the Washington Academy of Science, 16:317–323, 1926.
- [10] B. B. Mandelbrot.
An informational theory of the statistical structure of languages.
In W. Jackson, editor, *Communication Theory*, pages 486–502. Butterworth, Woburn, MA, 1953.
- [11] M. E. J. Newman.
The structure and function of complex networks.
SIAM Review, 45(2):167–256, 2003. [pdf](#) (田)
- [12] D. J. d. S. Price.
Networks of scientific papers.
Science, 149:510–515, 1965. [pdf](#) (田)




References IV

- [13] D. J. d. S. Price.
A general theory of bibliometric and other cumulative advantage processes.
J. Amer. Soc. Inform. Sci., 27:292–306, 1976.
- [14] L. F. Richardson.
Variation of the frequency of fatal quarrels with magnitude.
J. Amer. Stat. Assoc., 43:523–546, 1949. [pdf](#) (田)
- [15] G. Simmel.
The number of members as determining the sociological form of the group. I.
American Journal of Sociology, 8:1–46, 1902.
- [16] H. A. Simon.
On a class of skew distribution functions.
Biometrika, 42:425–440, 1955. [pdf](#) (田)



References V

- [17] D. J. Watts, P. S. Dodds, and M. E. J. Newman.
Identity and search in social networks.
Science, 296:1302–1305, 2002. [pdf](#) (田)
- [18] D. J. Watts and S. J. Strogatz.
Collective dynamics of 'small-world' networks.
Nature, 393:440–442, 1998. [pdf](#) (田)
- [19] G. U. Yule.
A mathematical theory of evolution, based on the conclusions of Dr J. C. Willis, F.R.S.
Phil. Trans. B, 213:21–, 1924.
- [20] K. Zhang and T. J. Sejnowski.
A universal scaling law between gray matter and white matter of cerebral cortex.
Proceedings of the National Academy of Sciences, 97:5621–5626, May 2000. [pdf](#) (田)



References VI



[21] G. K. Zipf.

Human Behaviour and the Principle of Least-Effort.
Addison-Wesley, Cambridge, MA, 1949.

Models of
Complex Networks

Modeling Complex
Networks

Random networks

Basics
Configuration model

Scale-free
networks

History
BA model
Redner & Krapivsky's
model
Robustness

Small-world
networks

References

Frame 73/73

